

# SUPER CAPACITOR

## SC927-0.7F Brief Datasheet

### 1. BASIC SPECIFICATION:


Items		Characteristic	
		Standard	Test condition
1.1	Rated capacity	0.7F	The lowest capacity when charge @1.5mA rated, discharge @ 1.5mA to end-off voltage 0.1V
1.2	Nominal voltage	2.7V	
1.3	Discharge end-off voltage	0.1V	
1.4	Equivalent Resistance in series	$\leq 30 \Omega$	Test by instrument of interior resistance (AC1kHz)
1.5	Charge voltage	2.7 $\pm$ 0.05V	
1.6	Charge time	Rated charge	Approx. 0.5 hour
		Fast charge	Approx. 0.2hour
1.7	Max. charge current	6mA	
1.8	Max. discharge current	6mA	When charge to above 2.7V
1.9	Working temperature	charge	-25 - 70°C
		Discharge	-25 - 70°C
1.10	Storage temperature	-20 – +45°C	
1.11	Average Weight	0.6g $\pm$ 0.01g	
1.12	Max. Size (mm)	Thickness	Diameter
		2.7 <sup>+0</sup> <sub>-0.1</sub>	9.7 <sup>+0</sup> <sub>-0.05</sub>
1.13	Appearance	There is no defect in the surface, such as crack, change color, leaking or transfiguration	
			The precision of vernier caliper is less than 0.02mm
			See by naked eyes

### 2. WARNING!

- \* Do not overcharge, force discharge, short-circuit, disassemble, deform, heat or place the capacitor near a direct flame. Any of the above actions could cause it to ignite, explode or become damaged.
- \* Keep this capacitor out of the reach of children.

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

### 3. DIMENSION

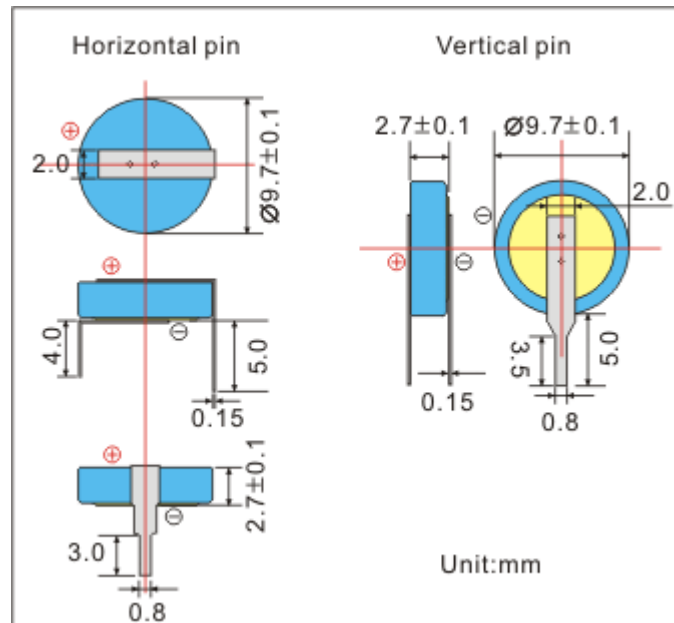

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

<http://eemb.com>      [global@eemb.com](mailto:global@eemb.com)