

LR14 Alkaline Dry Battery

Brief Datasheet


1 BASIC SPECIFICATION

| | | |
|---|-----------------|-----------------|
| Nominal capacity (under 3.9Ω load to 0.8V end-point voltage ,at +20°C) | | 7200mAh |
| Nominal voltage | | 1.5V |
| Open-Circuit Voltage | Initial | 1.55V or higher |
| | After 12 months | 1.50V or higher |
| Closed-Circuit Voltage | Initial | 1.35V or higher |
| | After 12 months | 1.30V or higher |
| Weight | | Approx. 68g |

2 DISCHARGE CAPACITY (20±2°C,RH:45%-75%)

| | | | |
|----------------|-----------|------------|----------|
| Load(Ω) | 20 | 3.9 | 6.8 |
| Discharge mode | 4h/day | 24h/d | 1h/d |
| End Voltage | 0.9V | 0.8V | 0.9V |
| Initial | Over 100h | Over 17.5h | Over 32h |

3 DIMENSION

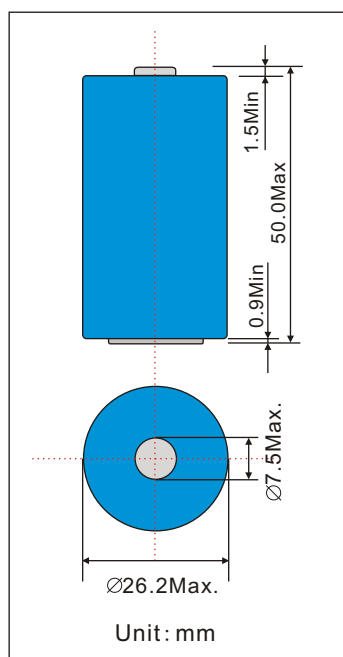

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.